

MF600P01 Macerator Pump



• Sound Pressure Level: <55 db(A)

Enclosure Class: IP 55
Max. Flow: 130L/min
Start Level: 65mm
Stop Level: 35mm

• Cable Length: 39 3/8"

FEATURES:

- 30 feet Max. Vertical Discharge
- 260 feet Max. Horizontal Discharge
- 3 Versatile Water Inlets
- 1½" Dual Use Vent Pipe
- Sewage Outlet With Built-in Check Valve

TECHNICAL SPECIFICATIONS:

• **Dimension:** $17^{5}/_{16}$ "L * $11^{7}/_{16}$ "H * $7^{1}/_{16}$ "W

• Power Factor: 0.85

• Insulation Class: 155(F)

• **Speed**: 3450 RPM

Power Consumption: 600 WSupply Voltage: 110V-60Hz

Specifications	Details
Material	Stainless Steel, Polypropylene
Color	White
Net Weight	14.3 LB
Gross Weight	16 LB



PACKAGE INCLUDED:





Pump

Clamps



Drain Pipe Elbow



Floor Mounting Kit












Stoppers

Inlet Pipe Hoses



DIMENSIONAL DIAGRAM:

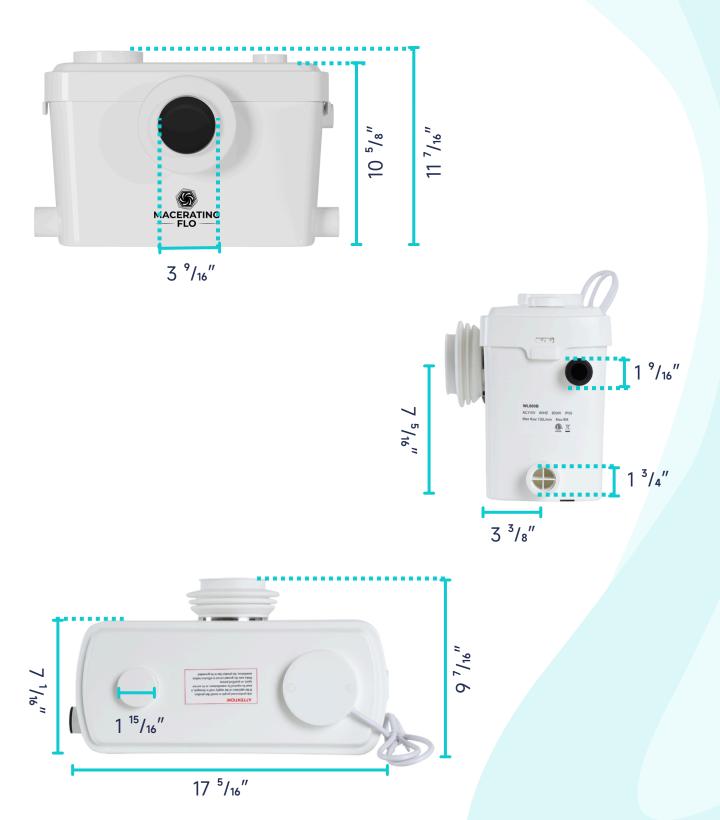



DIMENSIONAL DIAGRAM:

